



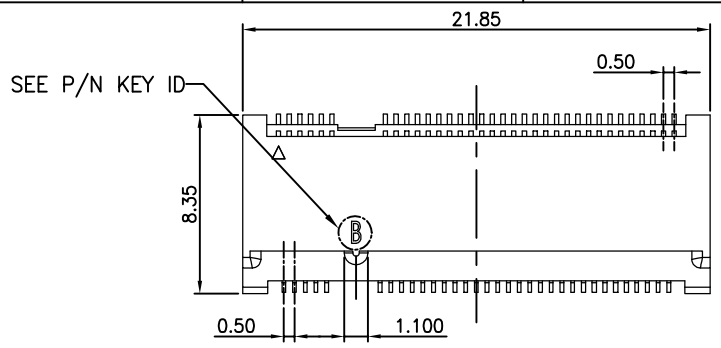


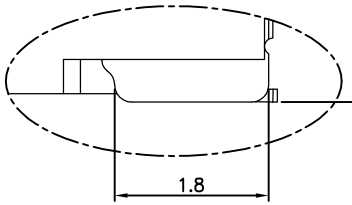



VIEW D
SCALE 4:1

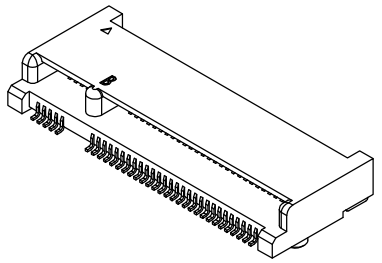


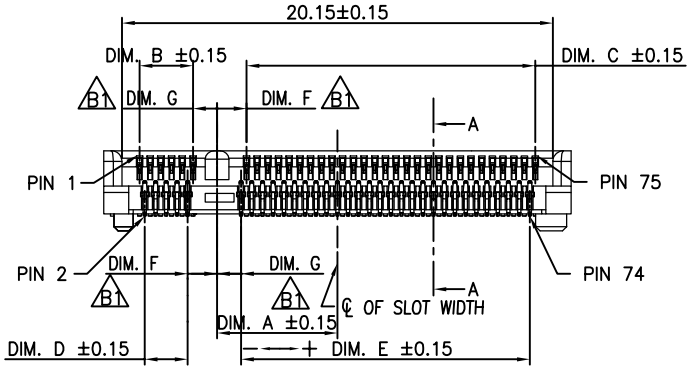




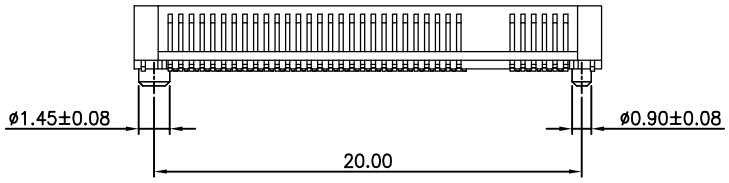

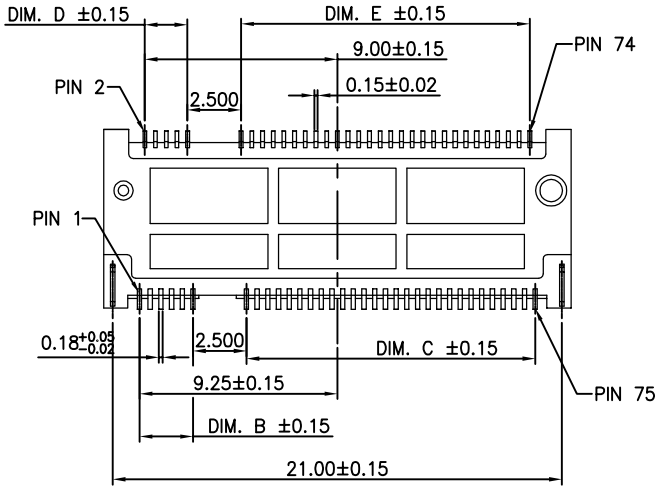



SECTION A–A

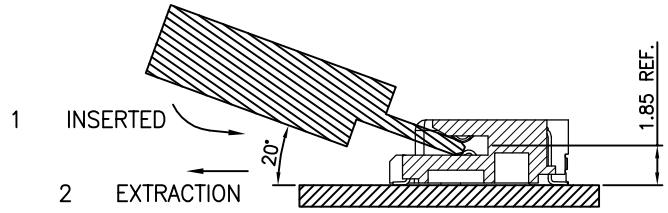

RECOMMENDED OPERATING FLOW:
MATE: 1
UNMATE: 2

				TOLERANCE	
				LINEAR	ANGLES
B1	-----	Lei Songping	Sep,02,2019	X.±0.40	X°.±
B	17017	Terry	Jul,19,2017	.X±0.30	.X°±
A	17014	Terry	May,15,2017	.XX±0.20	.XX°±
REV	ECN NO.	NAME	DATE	.XXX±0.10	.XXX°±

UMax conn 东莞市友贸实业有限公司 DONGGUAN UMAX ENTERPRISE LIMITED

APPD:	Jason	MAT'L:	
CHKD:	Schumi	FINISH:	
DRWN:	Terry	Q'TY:	


TITLE: M.2 CONN. P=0.5 3.2mm H

PART NO. 91302-32-067RXB

DWG NO. C-91302-32

UNITS	SCALE	SHEET	REV
MM	1 : 1	1 OF 4	B1

CUSTOMER

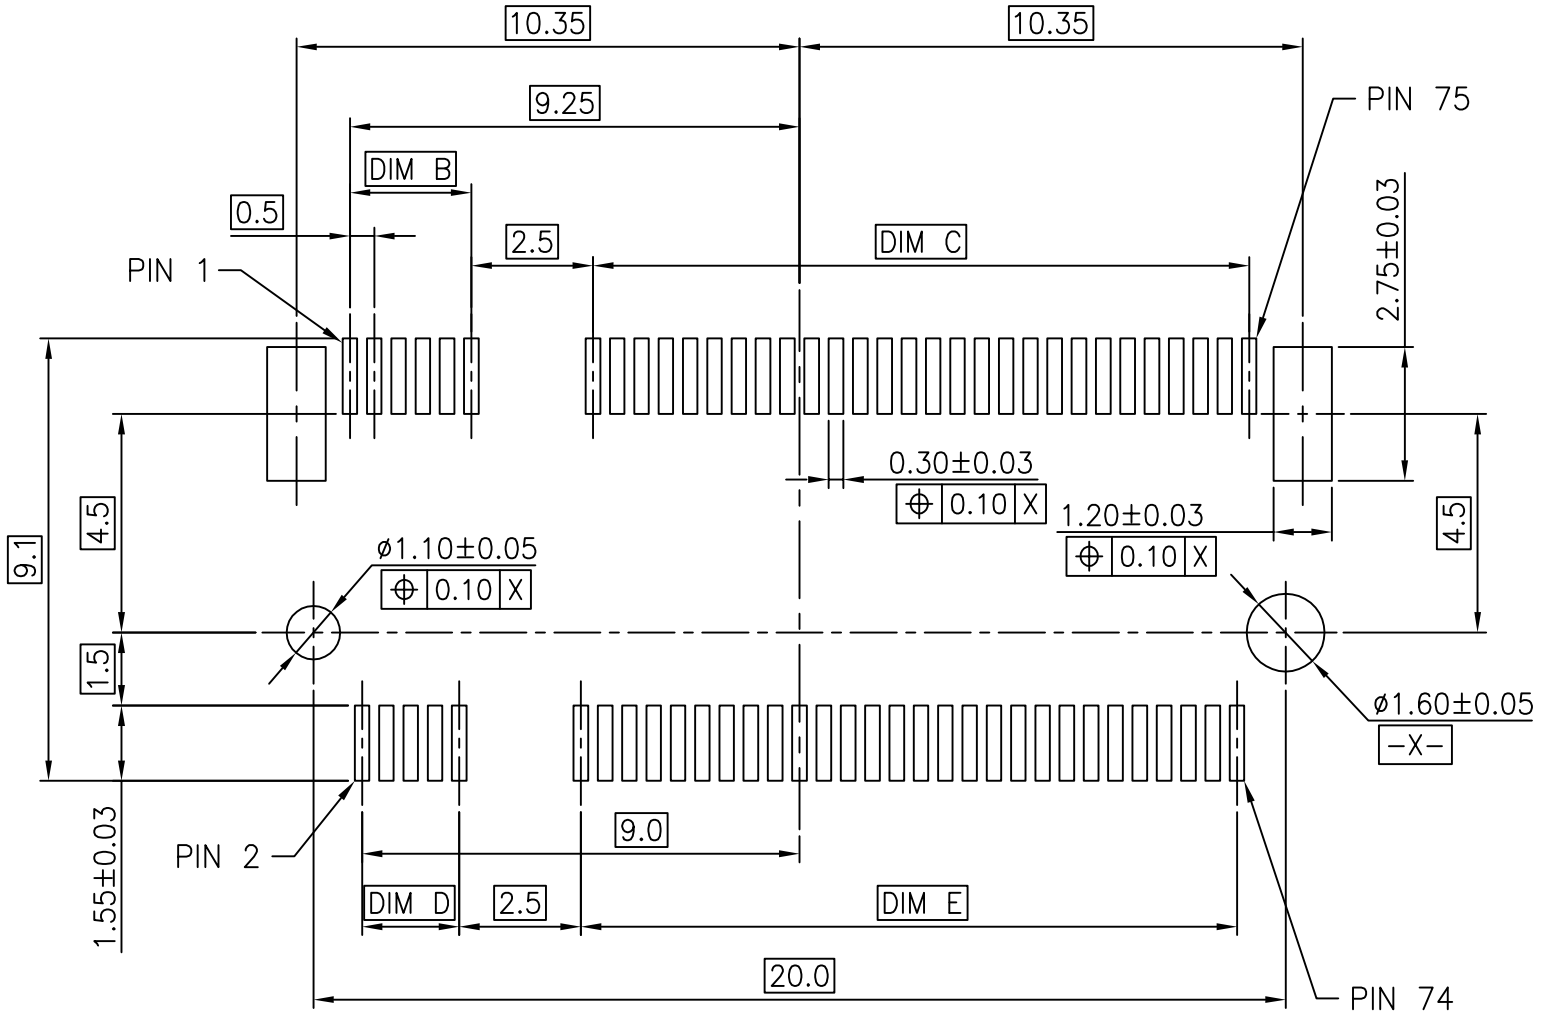

TOLERANCE	
LINEAR	ANGLES
X.±0.40	X°.±
.X±0.30	.X°±
.XX±0.20	.XX°±
.XXX±0.10	.XXX°±

UMax conn 东莞市友贸实业有限公司 DONGGUAN UMAX ENTERPRISE LIMITED

APPD:	Jason	MAT'L:	
CHKD:	Schumi	FINISH:	
DRWN:	Terry	Q'TY:	


TITLE: M.2 CONN. P=0.5 3.2mm H

PART NO.	91302-32-067RXB
DWG NO.	C-91302-32

UNITS	SCALE	SHEET	REV
MM	1 : 1	2 OF 4	B1

	SEE SHEET 1			
REV	ECN NO.	NAME	DATE	

CUSTOMER

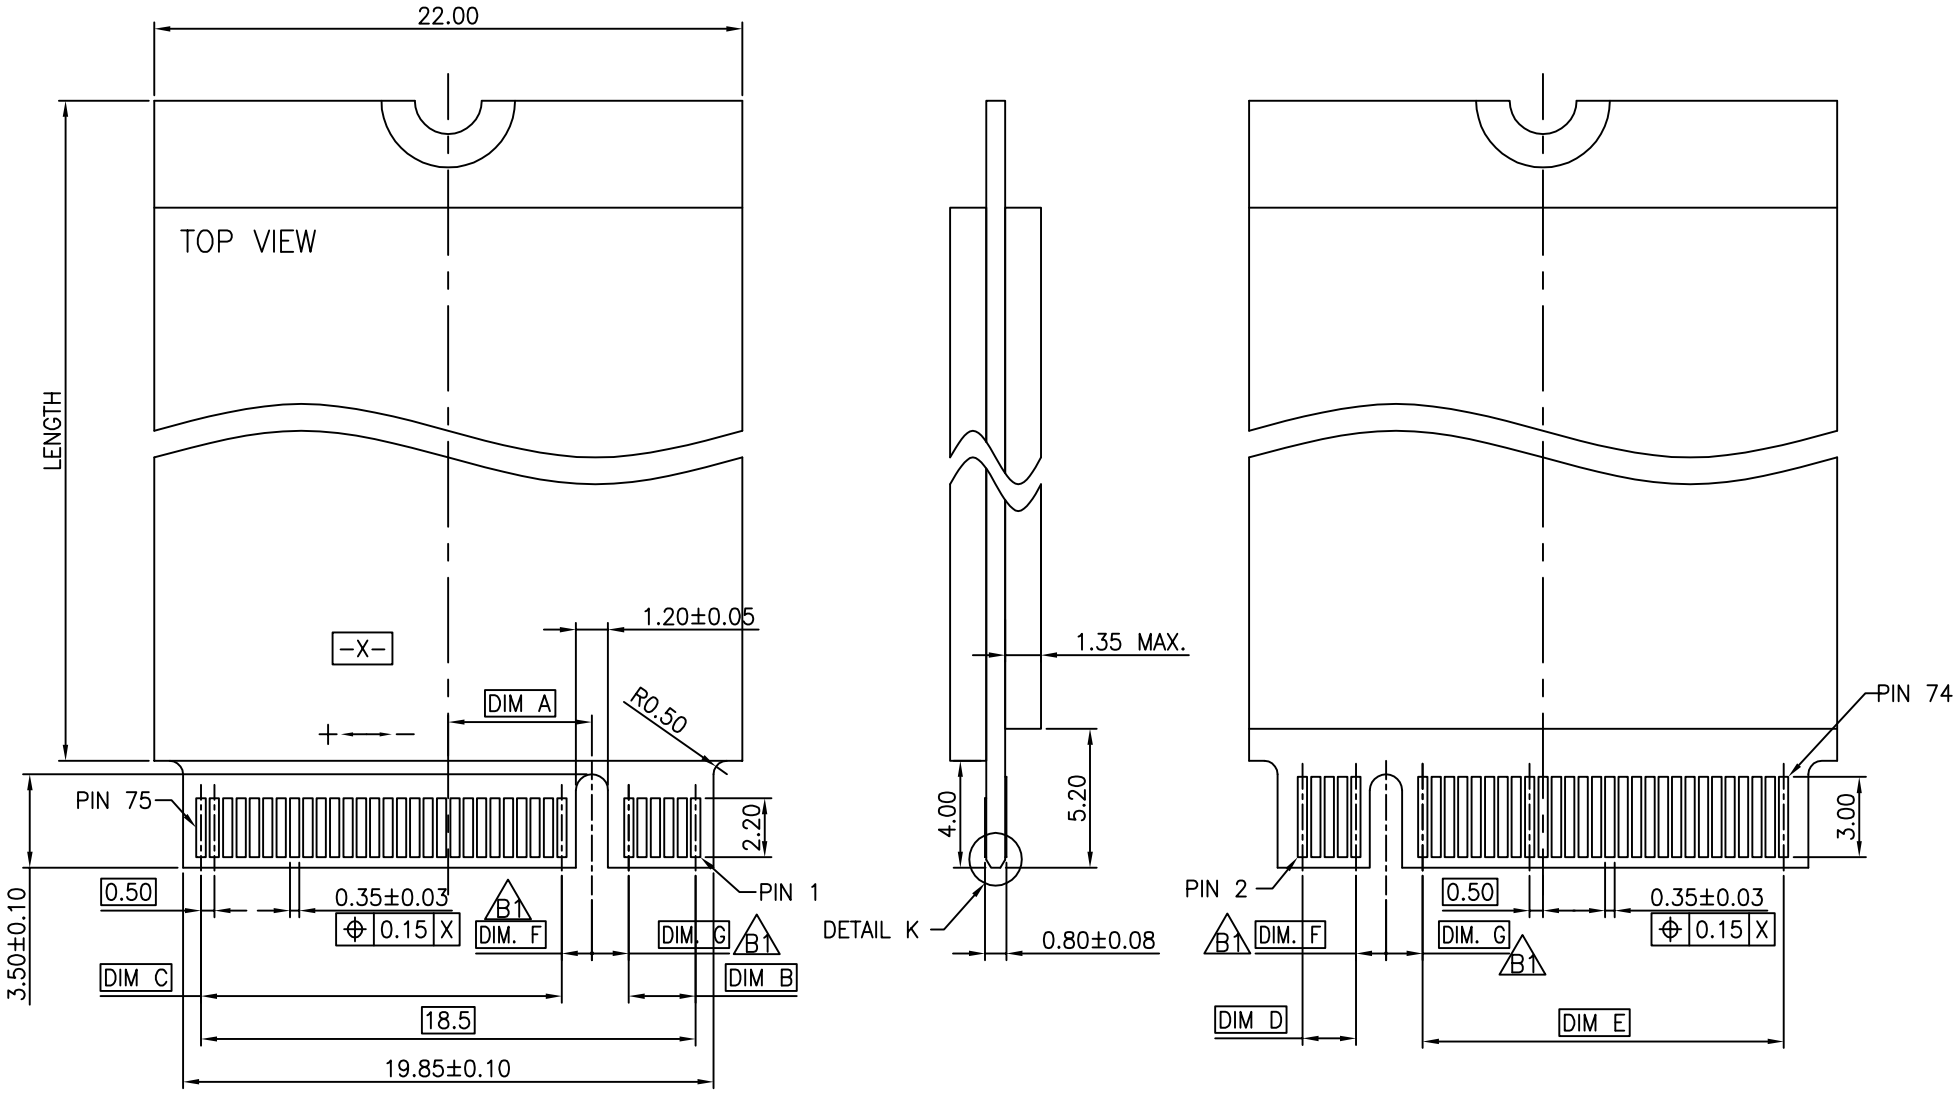

TOLERANCE	
LINEAR	ANGLES
X.±0.40	X°.±
.X±0.30	.X°±
.XX±0.20	.XX°±
.XXX±0.10	.XXX°±

UMax conn 东莞市友贸实业有限公司 DONGGUAN UMAX ENTERPRISE LIMITED

APPD:	Jason	MAT'L:	
CHKD:	Schumi	FINISH:	
DRWN:	Terry	Q'TY:	

TITLE: M.2 CONN. P=0.5 3.2mm H

PART NO.	91302-32-067RXB
DWG NO.	C-91302-32

UNITS	SCALE	SHEET	REV
MM	1 : 1	3 OF 4	B1

	SEE SHEET 1			
REV	ECN NO.	NAME	DATE	

CUSTOMER

NOTES:

1. MATERIAL :
   - 1.1 HOUSING: THERMOPLASTIC, HIGH TEMPERATURE, UL94 V-0, COLOR: BLACK.
   - 1.2 CONTACT: COPPER ALLOY.
   - 1.3 FITTING NAIL: COPPER ALLOY.
2. FINISH :
   - 2.1 CONTACT
     - [SEE TABLE] GOLD PLATING ON THE CONTACT AREA.
     - GOLD FLASH PLATING ON THE SOLDERING AREA.
     - 1.27um~2.54um [50u"~100u"] MIN. NICKEL UNDERPLATING OVERALL.
   - 2.2 FITTING NAIL
     - 2.54um~5.08um [100u"~200u"] MIN. MATTE-TIN PLATING ON THE SOLDERING AREA.
     - 1.27um~2.54um [50u"~100u"] MIN. NICKEL UNDERPLATING OVERALL.
3. PACKAGING SPEC.: K-91302-401

PART NO.:

91302 - 32 - 067 R X X

- 32: 3.2mm HEIGHT
- 067: 67 CONTACTS
- R: PACKING OPTIONS — R: TAPE & REEL
- X: CONTACT AREA PLATING — 2: GOLD FLASH; C: 15u" GOLD; D: 30u" GOLD
- X: KEY ID OPTIONS — A, B, C, D, E, F, G, H, J, K, L, M

B1

DIM. G	DIM. F	DIM. E	DIM. D	DIM. C	DIM. B	DIM. A	KEY ID
1.375	1.125	1.5	14.0	2.0	14.0	6.125	M
1.375	1.125	2.5	13.0	3.0	13.0	5.125	L
1.375	1.125	3.5	12.0	4.0	12.0	4.125	K
1.375	1.125	4.5	11.0	5.0	11.0	3.125	J
1.375	1.125	5.5	10.0	6.0	10.0	2.125	H
1.375	1.125	6.5	9.0	7.0	9.0	1.125	G

B1

DIM. G	DIM. F	DIM. E	DIM. D	DIM. C	DIM. B	DIM. A	KEY ID
1.125	1.375	9.5	6.0	9.5	6.5	-1.625	F
1.125	1.375	10.5	5.0	10.5	5.5	-2.625	E
1.125	1.375	11.5	4.0	11.5	4.5	-3.625	D
1.125	1.375	12.5	3.0	12.5	3.5	-4.625	C
1.125	1.375	13.5	2.0	13.5	2.5	-5.625	B
1.125	1.375	14.5	1.0	14.5	1.5	-6.625	A

REV	ECN NO.	NAME	DATE	TOLERANCE LINEAR	TOLERANCE ANGLES
B1	-----	Lei Songping	Sep,02,2019	X.±0.40	X°.±
B	17017	Terry	Jul,19,2017	.X±0.30	.X°±
A	17014	Terry	May,15,2017	.XX±0.20	.XX°±
				.XXX±0.10	.XXX°±

UMax conn 东莞市友贸实业有限公司 DONGGUAN UMAX ENTERPRISE LIMITED

APPD:	Jason	MAT'L:	
CHKD:	Schumi	FINISH:	
DRWN:	Terry	Q'TY:	

TITLE: M.2 CONN. P=0.5 3.2mm H

PART NO. 91302-32-067RXB

DWG NO. C-91302-32

UNITS	SCALE	SHEET	REV
MM	1 : 1	4 OF 4	B1

CUSTOMER